


# 8714 CV Max. 650 mA

## Chargers for lead acid batteries - linear



- Constant voltage charger for lead acid batteries
- Max. charge current 650 mA
- Suitable for charging of small, sealed lead acid batteries, e.g. 2,5-6 Ah
- Thermal fuse in transformer, thermal protection in regulator, protected against reversed polarity and short circuit proof
- Plug-in unit
- LED indicates charging
- Exchangeable DC plugs
- Approvals:
  - Complies w. medical std EN 60601 (on request)
  - For updates: see [www.mascot.no](http://www.mascot.no)
- Konstantspenningslader for blybatterier
- Maks. ladestrøm 650 mA
- Egnet for lading av mindre, forseglede blybatterier, f.eks. 2,5-6 Ah
- Termosikring i transformator, termisk beskyttelse i regulator, polvendings- og kortslutnings-sikker
- Plugg-inn enhet
- Lysdiode indikerer lading
- Utskiftbare DC plugger
- Godkjenninger:
  - Tilfredsst. medisinsk std EN 60601 (på forespørsel)
  - For oppdat.: se [www.mascot.no](http://www.mascot.no)



### Technical specifications\*


### Tekniske data\*

Input voltage:	Inngangsspenning:	230 VAC +/-10%, 50/60Hz
Charging voltage:	Ladespenning:	14,9 VDC *
Charge current:	Ladestrøm:	Max. 650 mA
Leakage current from battery when mains switched off:	Strømtrekk fra batteri ved frakoblet nett:	< 0,1 mA
Temperature range:	Temperaturområde:	-10°C - +40°C
Current limiting:	Strømbegrensning:	650 mA
Insulation class:	Isolasjonsklasse:	II
Electrical safety standard:	Elektrisk sikkerhetsstandard:	EN 60065, EN 60950
EMC standards	EMC standarder	
• Emission:	• Emisjon:	EN 61000-6-3
• Immunity:	• Immunitet:	EN 61000-6-1
Output terminals	Utgangsterminaler	
• Cord with/without plug:	• Sek. ledning med/uten plugg:	Tilbehør / Accessories
Dimensions without plug (LxWxH):	Mål uten plugg (LxBxH):	100 x 51 x 63 mm
Weight:	Vekt:	450 g

\* The unit is internally adjustable and at float charge the voltage should be adjusted to 13,6-13,9 V. In cycle use it's normally recommended to charge 12 V batteries with 14,6-15 V. If there should be any doubt about the charging condition for a particular battery, contact the battery manufacturer or supplier for more information.  
Can on request be delivered with other output voltages /

Enheten er innvendig justerbar og ved vedlikeholdslading bør spenningen justeres ned til 13,6-13,9 V. Det er vanligvis anbefalt å lade 12 V blybatterier med 14,6-15 V ved daglig bruk. Skulle det være usikkerhet m.h.t. et bestemt batteri, anbefaler vi at man kontakter batteriproducent eller leverandør.  
Kan på bestilling leveres med andre utgangsspenninger.

### Charging characteristics Ladekarakteristikk

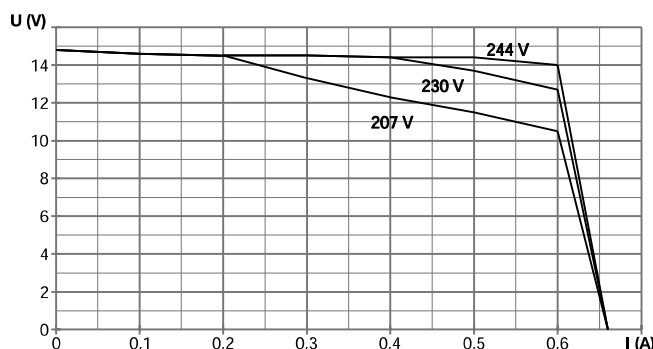

[www.mascot.com](http://www.mascot.com)

[sales@mascot.no](mailto:sales@mascot.no)

TS170111

**Main Office NORWAY**  
Box 177  
N-1601 Fredrikstad  
+47 69 36 43 00

**Mascot UK**  
Box 2090, Salisbury  
Wiltshire SP2 2BH  
+44 172 250 4853

**Mascot DE, BENELUX**  
Hirschbergstr. 28/7  
D-74838 Limbach  
+49 628 795 140

**Mascot DE, CH, AT**  
Tettnanger Str. 52  
D-88239 Wangen  
+49 752 895 1677

**Mascot FRANCE**  
38 rue Leo Lagrange  
F-94270 Le Kremlin Bicêtre  
+33 146 587 185

**Mascot BALTIC, RUSSIA**  
Peterburi tee 81  
11415, Tallin, Estonia  
+372 555 21 121

**Mascot SWEDEN**  
Box 177  
N-1601 Fredrikstad  
+46 526 14025