



Refill system for EPSON Work Force 7110 INSTALLATION GUIDE

Thank you for choosing our products. Before the installation read carefully this instructions. For any clarification or technical support contact our customer service: www.cheapoffice.it



1) Open the printer cover and insert a small piece of paper or plastic in the closing sensor to allow the printer to work with the cover open without reporting errors. Photo 1



2) To facilitate assembly operations is necessary turn on the printer, wait a few seconds and remove the power cable while the trolley moves to the left. After removing the power cable, the printer trolley might be easily moved with your hands.


3) Manually move the printer trolley in the cartridges change area, gently remove the trolley cover levering with a flat-blade screwdriver. Photo 2




4) Place the ink tanks on the right side of the printer using the adhesive velcro. Photo 3



5) Unscrew the bottle and screw the measuring spout. Photo 4

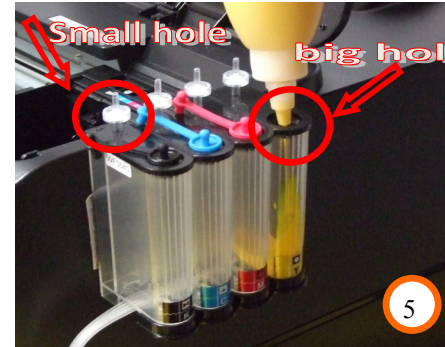


6) Fill the tanks K/C/M/Y following the colors sequence (photo 5). NB: On the tanks upside there are 4 big holes to refill and 4 small holes that during the operation will must be open, eventually you can insert in them an air filter.

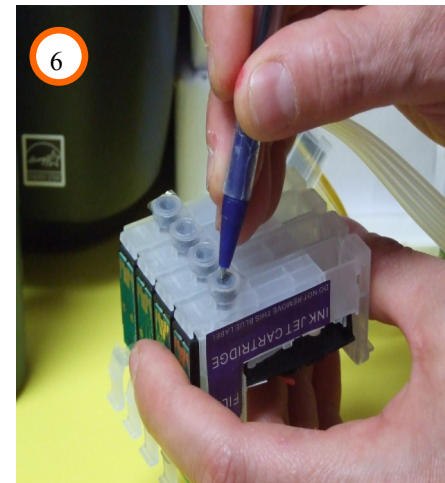

7) Reverse the cartridge group. With a pen tip pierce the plastic operulum that protects the valves (Photo 6).



7) Insert completely the syringe tip in a cartridge valve and aspire until the syringe is full of ink. You can return the ink that is accumulate in the syringe in the tank of the corresponding color. Repeat the operation for all the colors. (Photo 7)

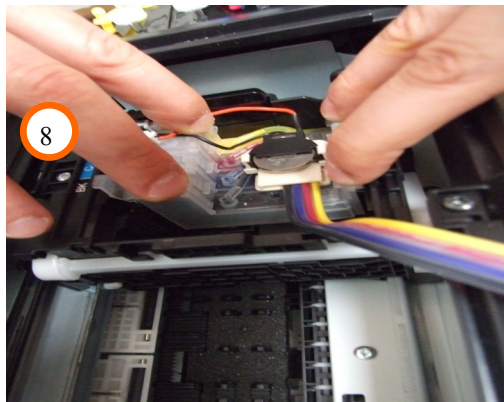


8) Place the cartridges in the print trolley and press the block until you hear the hooking click. photo 8




9) Place the adhesive clip and the pipes (photo 9).



10) For the right functioning the pipe should not ride the trolley race. To make sure that it moves correctly we recommend to move manually the trolley to the right and to the left (photo 10-11). In this way you can adjust the pipe length so that, during the movement will always remain well stretched out and do not tuck into itself.

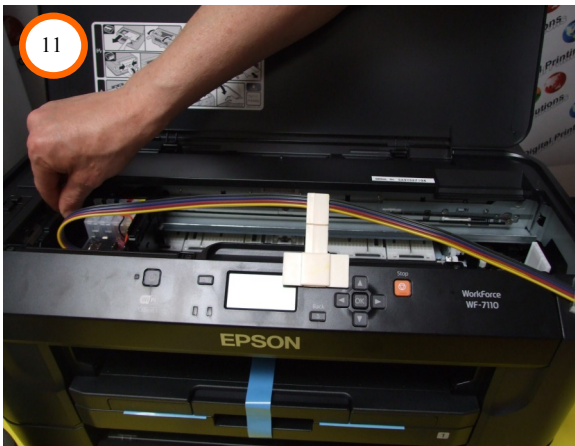

11) During the operation the printer must have the lid open to let the pie turn correctly.

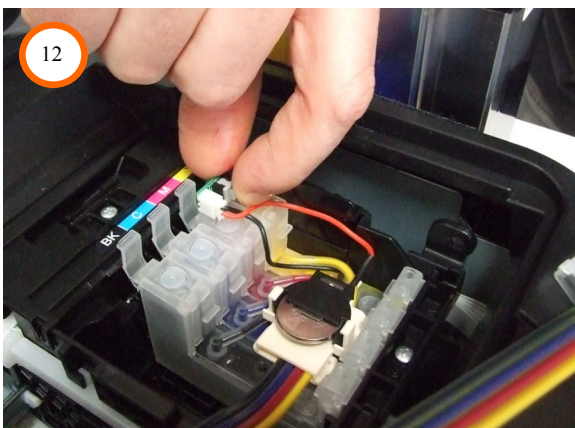

12) When you see the message of empty cartridge it will be necessary bring the machine in cartridge change position following the display instructions, it will not be necessary remove the cartridges, you just have to press the reset button for 10 seconds. Photo 12

IMPORTANT NOTE: If the printer jams the paper or or turn off suddenly, don't leave the printer in this position. You should remove the paper and turn on the printer, so the print trolley can resume the position. It will be necessary turn off the printer correctly, if the trolley stays out of the correct position, the print head could get dry and become unusable.

IMPORTANT NOTE: before starting to print verify that the ink quantity is sufficient in order to avoid **that the ink tanks get completely empty.**